


FUSED SINGLE-MODE WDM (1480NM/1550NM)

SWDM1415 Series

HiPhotonics 1480nm/1550nm fused single-mode wavelength division multiplexers are manufactured using the proven fused biconical taper technology and HiPhotonics stringent quality procedures. With low insertion loss and flat passband this excess loss and very low polarization sensitivity and are available with various device is ideal for combining or separating optical signals in the 1480nm and 1550nm bands. reliability is guaranteed through stringent tests to fully meet Telcordia GR- 1221 requirements

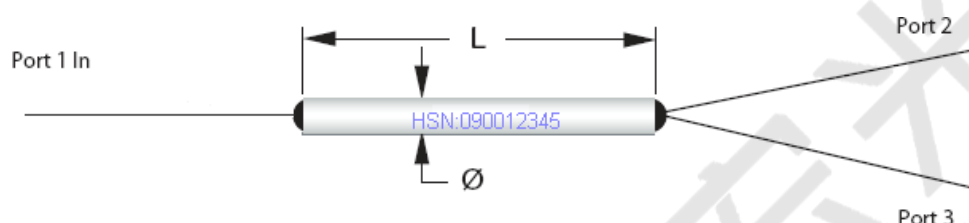

Performance Specification

SWDM1415 Series	Standard		High Isolation		Unit
Grade(P=Premium,A=Grade A)	P	A	P	A	nm
Operating Wavelength	1475~1485nm/1540~1555nm				nm
Insertion Loss	<0.3	<0.5	<0.7	<0.8	dB
Wavelength Dependent Loss	<0.15	<0.20	<0.15	<0.20	dB
Temperature Dependent Loss	<0.15	<0.20	<0.15	<0.20	dB
Min Isolation	>23		>26		dB
Polarization Dependent Loss	<0.1		<0.2		dB
Directivity	>55				dB
Maximum Power Handling	300				mW
Operating Temperature Range	-10 ~ +75				℃
Storage Temperature Range	-40 ~+ 85				℃
Package Dimensions	P1:250um bare fiber		ø 3.0X 45		mm
	P2:900nm loose tube		ø 3.0X 54		
	P3:3mm cable		L90xW20xH10		
Fiber Type	Corning-SM-28e				

Features:

- Ultra High Isolation
- Ultra Low Insertion Loss
- High Stable& Reliable
- Low polarization Sensitivity
- Bidirectional

Applications:

- Telecommunications
- CATV
- Subscriber Loop
- Local Area Networks
- Laboratory R&D

Note:

- (1) Values are referenced without connector loss.
- (2) Return loss includes PDL and WDL.

Order Information SWDM-①①-②②-③③-④④-⑤⑤-⑥⑥-⑦⑦

①①Operating Wavelength	②②Port	③③Type	④④Grade	⑤⑤Packaging Dimension
1415=1480/1550nm	12=1X2		P=P Grade	A=P1+250um bare fiber
	22=2X2		A=A Grade	B=P2+900um loose tube
		S=Standard		C=P3+3mm cable
		H=High isolation		
⑥⑥Fiber Length	⑦⑦Connector Type			
A=0.5 Meter	0=None			
B=1 Meter	1=FC/UPC			
C=1.5 Meter	2=FC/APC			
D=2.0 Meter	3=LC/UPC			
	4=LC/APC			
S=Special	S=Special			