

Fiber Attenuator(0dB)


Feature

High precise size
Meet JIS standard
Low PDL

Application:

Telecommunication networks
fiber Cable TV system

	Unit	Condition	Specifications
Connector Type	---	---	FC/SC/LC/ST
1 Typ. Insertion Loss	dB	---	≤ 0.3
2 Typ. Insertion Loss	dB	---	≤ 0.5
Fiber Type	um	---	9/125&50/125&62.5/125
Wavelength Range	nm	---	850,1300,1260~1640
Vibration Insertion Loss	dB	10-55Hz,2H	≤ 0.2
Fall Insertion Loss	dB	1.5M,5 Round Drop	≤ 0.2
Max. Optical Power (CW)	mW		500
3D Index		Standard	UPC $\geq 85\%$ APC $\geq 75\%$
3D Index		100% Standards compliant	
Operating Temperature	°C	'---	-5 to +70
Storage Temperature	°C	'---	-40 to +85

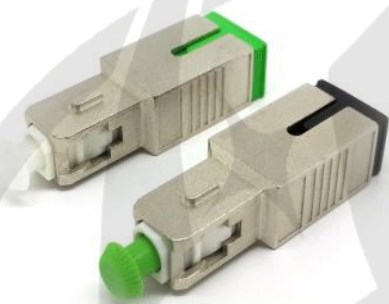

SC-SCA Metal Male-Female



SC Male-female Attenuator