


Central Loose Tube Outdoor Cable（GYXTW）

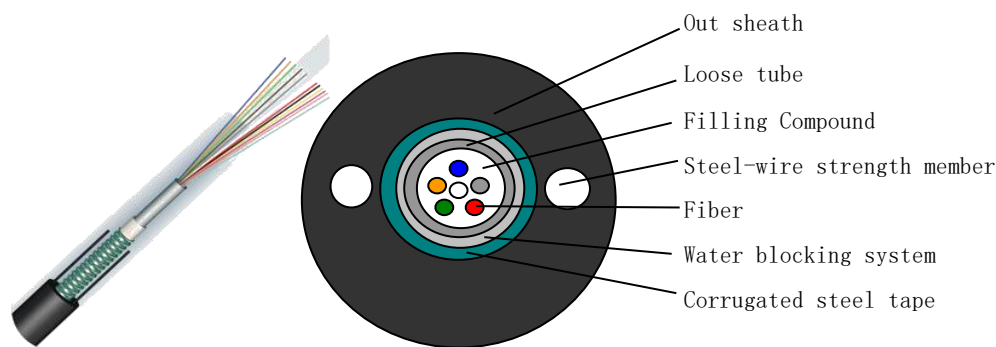

Application

Adopted to Outdoor distribution

Suitable for aerial pipeline laying method

Long distance and local area network communication

Characteristics

Steel-wire parallel member filler protect tube fiber steel tape amored

Excellent mechanical and environmental performance

Adopt optic fiber ribbon compact structure light weight

Technical parameters:

cable count	Out sheath diameter	Weight	Minimum allowable Tensile strength(N)		Minimum allowable Crush load (N/100mm)		Min bending radius(MM)		Suitable temperature
			short term	long term	short term	long ter	short term	long term	
Core	(mm)	(KG)							(℃)
2	8.3	78.00	1500	600	1000	300	20D	10D	-40+60
4	8.3	78.00	1500	600	1000	300	20D	10D	-40+60
6	8.3	78.00	1500	600	1000	300	20D	10D	-40+60
8	8.3	78.00	1500	600	1000	300	20D	10D	-40+60
10	8.3	78.00	1500	600	1000	300	20D	10D	-40+60
12	8.3	78.00	1500	600	1000	300	20D	10D	-40+60

Specifications info: GY-T-X-W

GY:

tical Cable Communication

T:

Ointment filling structure

X:

Cable Center (coating) structure

W:

Parallel bonded wire + PE jacket

Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125	渐变型折射率Gradient-type refractive index
			A1b:50/126	
	Single-mode	G.652(A、B、C、D)		B1.routines
		G.653		B2.Zero dispersion-shifted
		G.654		B1.2 Cutoff wavelength shift
		G.655		B4 Non-zero dispersion-shifted