


Outdoor Optic Fiber Waterproof cable

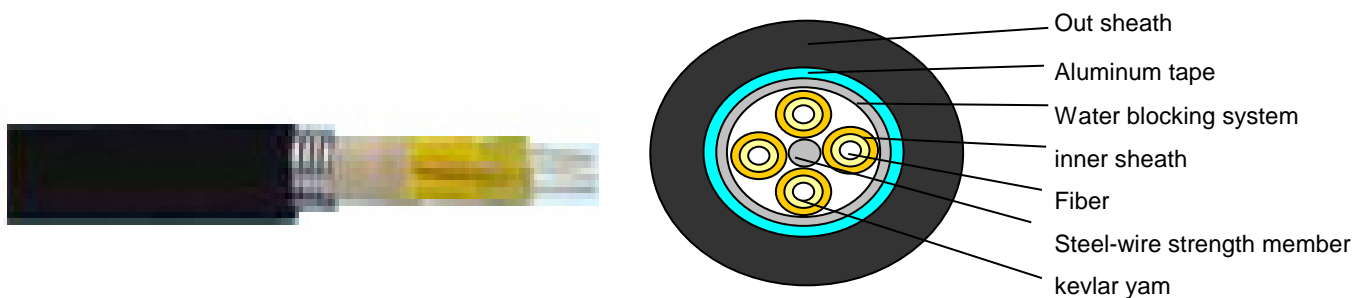

Application

Adopted to outdoor distribution

Connected to connectors of various models interconnect

Can be installed conveniently and operated simply

Characteristics

More single-core cable design.

Waterproof and applicable scurviness environment

Operated simply

Technical parameters:

cable count (Core)	out sheath diameter (MM)	Weight (KG)	Minimum allowable Tensile strength(N)		Minimum allowable Crush load (N/100mm)		Min bending radius(MM)		Suitable temperature (℃)
			short term	long term	short term	long term	short term	long term	
2	10.5	155.00	1500	600	1000	300	20D	10D	-40+60
4	10.5	155.00	1500	600	1000	300	20D	10D	-40+60
6	11.5	185.00	1500	600	1000	300	20D	10D	-40+60

Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125	Gradient-type refractive index
			A1b:50/126	
	Single-mode	G.652(A、B、C、D)		B1.1 routines
		G.653		B2 Zero dispersion-shifted
		G.654		B1.2 Cutoff wavelength shift
		G.655		B4 Non-zero dispersion-shifted