


Unitube Light-armored Ribbon Fiber Cable(GYDXTW)

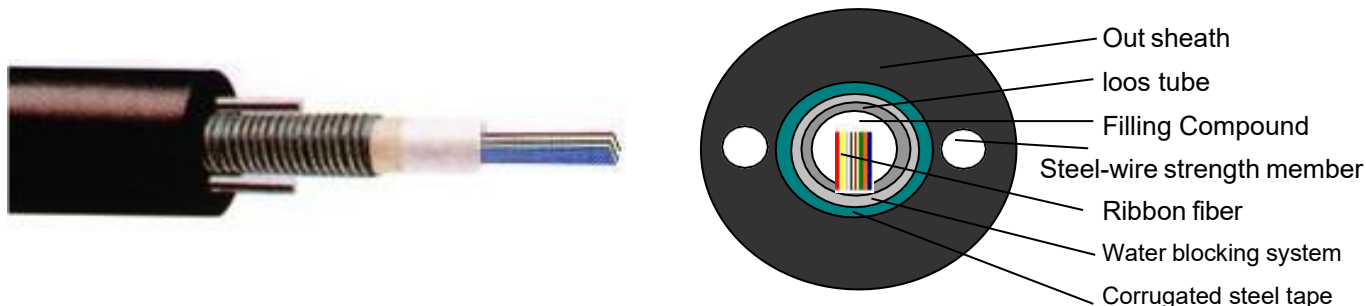

Application

Adopted to Outdoor distribution

Suitable for aerial pipeline laying method

Long distance and local area network communication

Characteristics

Steel-wire parallel member filler protect tube fiber steel tape amoret structure light weight

Excellent mechanical and environment and operated simply

Can be installed conveniently and operated simply

Technical parameters:

cable count (Cores)	out sheath diameter (mm)		Wei ght (Kg)	Minimum allowable Tensile		Minimum allowable Crush load		Min bending Radius (MM)		Suitable temper (℃)
				short term	long term	short term	long term	short term	long term	
24	15		240.00	1500	600	1000	300	20D	10D	-40+60
48	15		240.00	1500	600	1000	300	20D	10D	-40+60
60	15		240.00	1500	600	1000	300	20D	10D	-40+60
72	16		272.00	1500	600	1000	300	20D	10D	-40+60
84	16		272.00	1500	600	1000	300	20D	10D	-40+60
144	18		325.00	1500	600	1000	300	20D	10D	-40+60

Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125	Gradient-type refractive index
			A1b:50/126	
	Single-mode	G.652(A、B、C、D)		B1.1 routines
		G.653		B2 Zero dispersion-shifted
		G.654		B1.2 Cutoff wavelength shift
		G.655		B4 Non-zero dispersion-shifted