


Duplex-Fiber Armored indoor optical cable

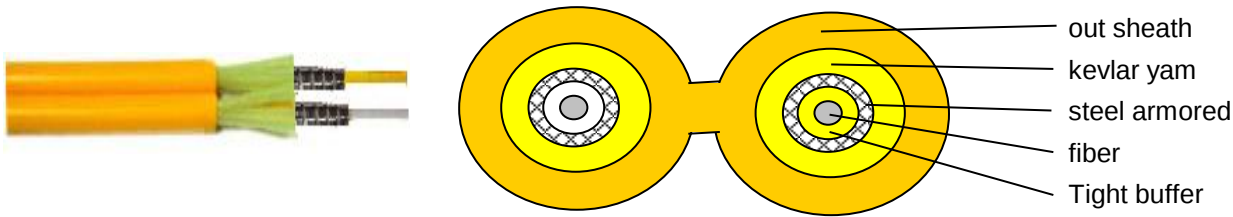

Application:

Adopted to indoor distribution.

As pigtail of communication equipment.

Suitable for communication equipment served .

Can be installed conveniently and perated simply.

Characteristics:

High-strength Aramid strengthening

With a better environment and the mechanical properties

Soft, easy to peel, to facilitate follow

Small size, light weight.

Technical parameters:

out sheath diameter (MM)	Tight buffer diameter (MM)	Weight (KG)	Minimum allowable Tensile strength(N)		Minimum allowable Crush load (N/100mm)		Min bending radius(MM)		Suitable temperature (℃)
			short term	long term	short term	long term	short term	long term	
2.8×5.8	0.9	35.00	1000	300	1000	500	20D	10D	-20+60
3.0×6.2	0.9	35.00	1000	300	1000	500	20D	10D	-20+60

Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125 OM1; OM3; OM4	Gradient-type refractive index
			A1b:50/126	
	Single-mode	G.652(A、B、C、D)		B1.1 routines
		G.653		B2 Zero dispersion-shifted
		G.654		B1.2 Cutoff wavelength shift
		G.655		B4 Non-zero dispersion-shifted
		G.657A1, A2		B5 Plus bending insensitive