

Optical Distribution Frame panel 12-288 port

Description:

The Hiphotonics case is made of cold rolled steel sheet, electrostatic spraying, provide 12&72&144 adapter, available for FC/SC/LC/DIN

Features:

- Fit for 19" rack
- Reliable fastening, stripping and earthing devices for optic fiber
- Fiber splice tray make fiber avoid damaging
- Suitable for FC、SC、LC (SC Feet) DIN, etc.



Performance:

Operating condition

- Operating temperature: -25 °C ~ +40 °C
- Storage temperature: -25°C ~ +40 °C
- Relative humidity: ≤85% (+30 °C)
- Air pressure: 70Kpa ~ 106Kpa
- Color: Beige




ODF08C1

Dimension:

Model	Dimension (H*W*D)
ODF08C1-1U	1U×485mm×300mm
ODF08C1-2U	2U×485mm×300mm
ODF08C1-3U	3U×485mm×300mm
ODF08C1-4U	4U×485mm×300mm

Optical Distribution Frame panel 12-288 port

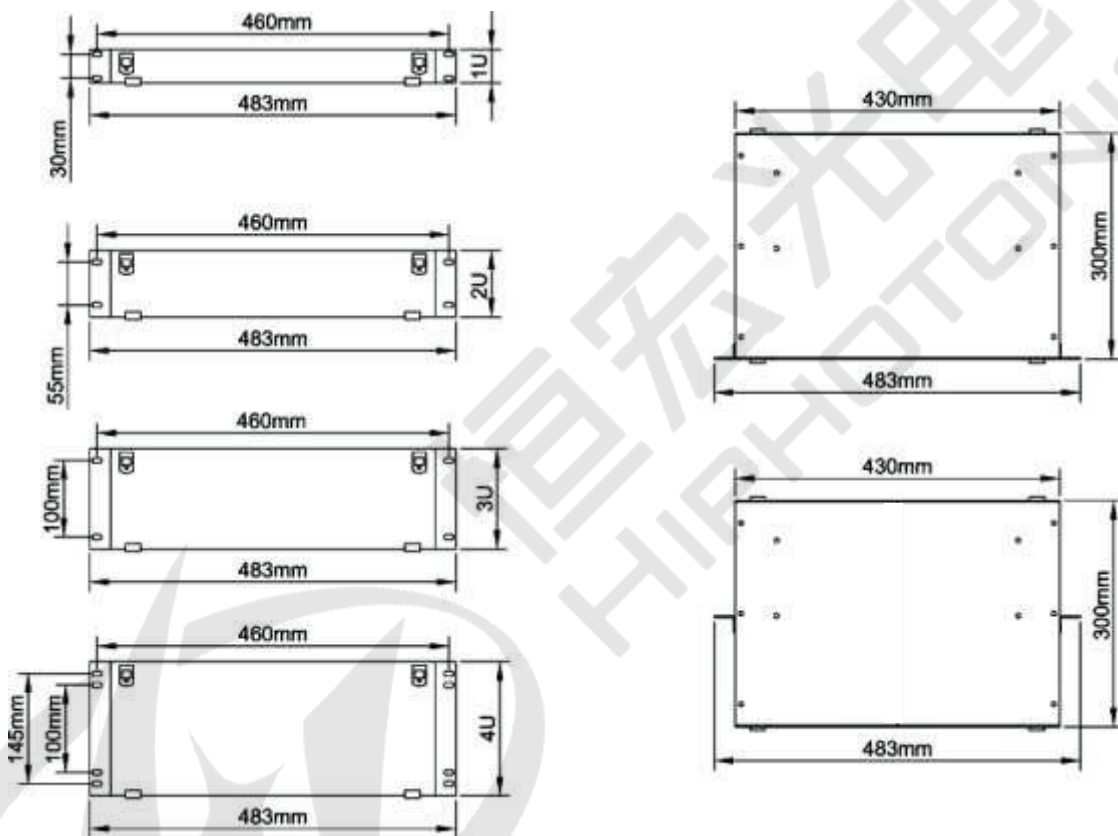

Accessories:

1	Heat shrinkable tube	---
2	Nylon Locking Tie Wraps	3PCS
3	M6 Rack-Screw	4PCS
4	Fix Cable Sticker	3PCS
Notice: "—" the number is same to fiber cord number		

- * Length: 480mm Width: 300mm Height: 3U Weight: 3.0kg Color: Beige
- * Cable entry 4× Ø20mm gland holes