

Optical Fiber Panel-12F/24F/48F

Application:

- Optical Access Network (OAN)
- Data processing centers
- Cable television (CATV)
- local area network (LAN)
- Coarse Wavelength Division Multiplexer (CWDM)

Features:

- Removable panel design can meet different requirements
- Fit for 19" rack
- Suitable for SC、LC、FC、ST, etc.



OFP12/24/48

Description:

The Hiptotonics case is made of cold rolled steel sheet, electrostatic spraying, provide 12&48 single and double adapter, available for SC/LC/FC/ST.

Performance:

Operating condition

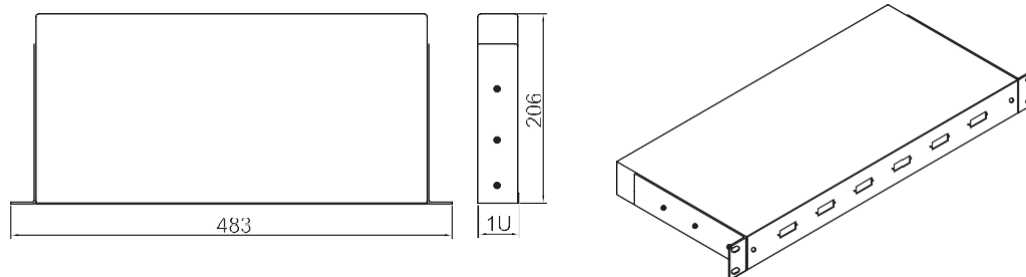
- Operating temperature: -25°C ~ +40°C
- Storage temperature: -25°C ~ +55°C
- Relative humidity: ≤85% (+ 30°C)
- Air pressure: 70Kpa ~ 106Kpa
- Color: Black








Dimension:

Model	Dimension (L x W x H)
OFP08X4-12-S	483mm×206mm×1U
OFP08X4-12-D	483mm×206mm×1U
OFP08X4-24-S	483mm×206mm×1U
OFP08X4-24-D	483mm×206mm×1U
OFP08X4-36-S	483mm×206mm×1U
OFP08X4-36-D	483mm×206mm×1U
OFP08X4-48-S	483mm×206mm×1U
OFP08X4-48-D	483mm×206mm×1U
OFP08X4-96-2×D(LC)	483mm×206mm×1U

OFP08X4



	
	SC(Simplex)/LC(SC Feet),6Pots
	SC(Simplex)/LC(SC Feet),12Pots
	SC(Simplex)/LC(SC Feet),24Pots
	SC(Duplex)/LC(Quad),6Pots
	SC(Duplex)/LC(Quad),12Pots
	SC(Duplex)/LC(Quad),18Pots
	SC(Duplex)/LC(Quad),24Pots
	FC,12Pots
	FC,24Pots
	ST/FC(D Feet),12Pots
	ST/FC(D Feet),24Pots

Accessories:

1	Heat shrinkable tube	—
2	Nylon Locking Tie Wraps	3PCS
3	Cable Hoop	2PCS
4	M6 Rack-Screw	4PCS
5	Fix Cable Sticker	3PCS
Notice: “——” the number is same to fiber cord number		

- * Length: 480mm Width: 206mm Height: 1U Weight: 3.1kg Color: Black
- * Cable entry 4× Ø20mm gland holes