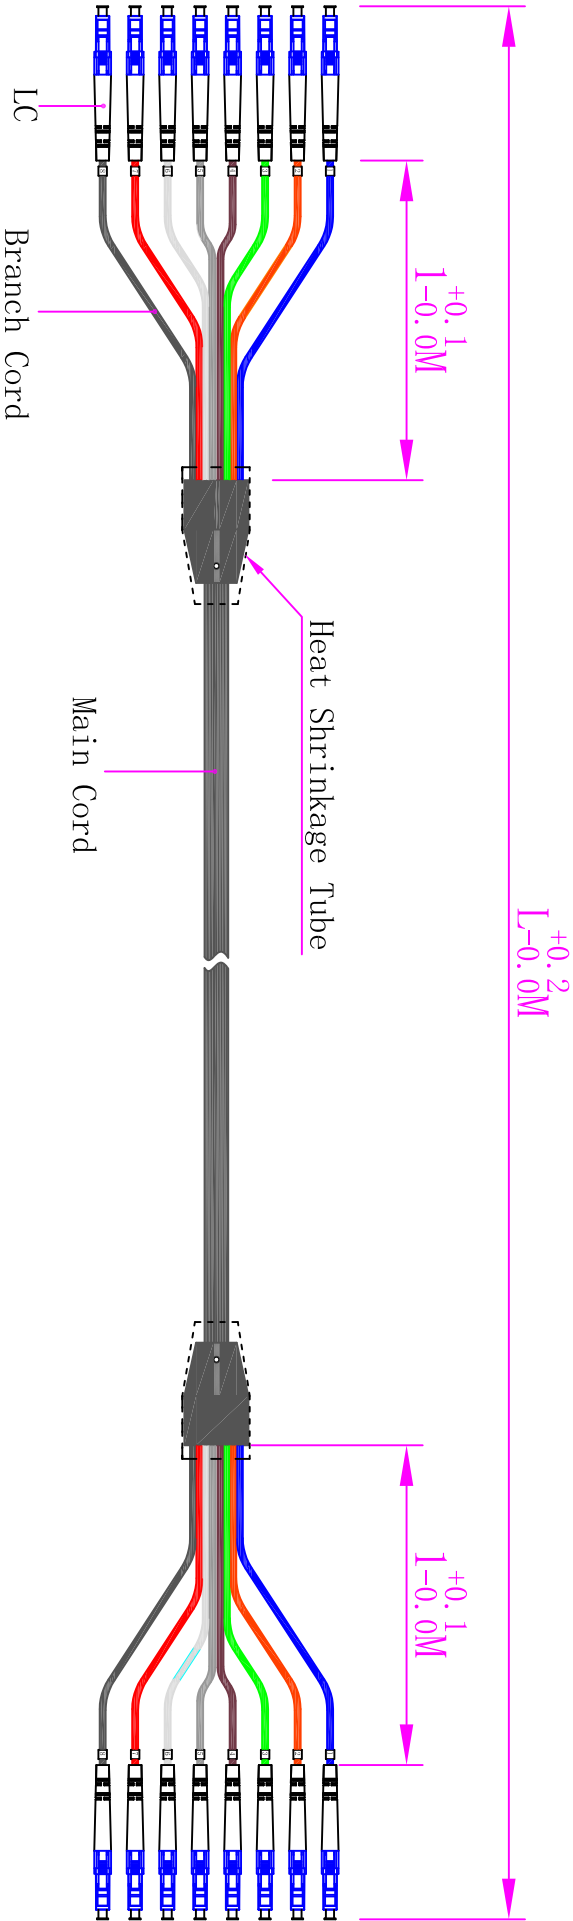


SPEC.		Single Mode	Multi Mode
Insertion loss		≤0.3db	≤0.3db
Return loss		PC ≥ 45db UPC ≥ 55db APC ≥ 65db	--
Return loss		≤0.1db	
Vibratility		≤0.2db	
Interconvertity		≤0.2db	
Pressure Resistance		≥80kg	
Operating Temperature		-20℃ -- +75℃	
Tensile Resistane	Branch Cord	10kg	
	Main Cord	30kg	
Outer Dia.	Branch Cord	2.8±0.1mm	
	Main Cord	5.0±0.1mm	
Cable Length		Custom length available upon request	

Reference Print	Product Name:			Part No	
Design	8-LC-8-LC			Properation	
Drawer	Surface Finish	Material		Unit	
Aduitor					
Approve					