


Single-sheath armored cable

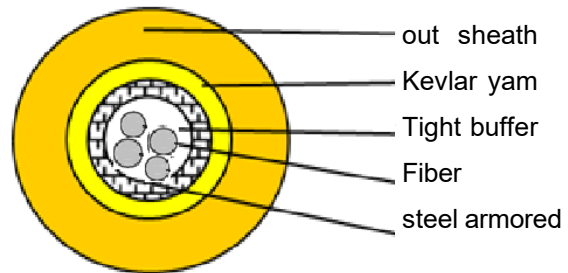

Application:

Adopted to indoor distribution.

As pigtail of communication equipment.

Suitable for communication equipment served

Can be installed conveniently and operated simply.

Characteristics:

High-strength aramid, stainless steel tube to strengthen.

With a better environment and the mechanical properties.

Soft, easy to peel, to facilitate follow.

Anti-bite anti-pressure.

Technical parameters:

out sheath diameter (mm)	Tight buffer diameter (MM)	Weight (KG)	Minimum allowable Tensile strength(N)		Minimum allowable Crush load		Min bending Radius (MM)		Suitable temperature (℃)
			short term	long term	short term	long term	short term	long term	
2c /3.0	0.6	18.00	1000	300	1000	500	20D	10D	-20+60
8c /6.0	0.6	26.00	1000	300	1000	500	20D	10D	-20+60

Fiber standard control

Fiber Type	Multi-mode	G.651	A1a:50/125 OM1, OM3, OM4	Gradient-type refractive index	
			A1b:50/126		
	Single-mode	G.652(A、B、C、D)			B1.1 routines
		G.653			B2 Zero dispersion-shifted
		G.654			B1.2 Cutoff wavelength shift
		G.655			B4 Non-zero dispersion-shifted
		G.657A1\A2			B5 Plus bending insensitive