


Cat.6 unshielded keystone

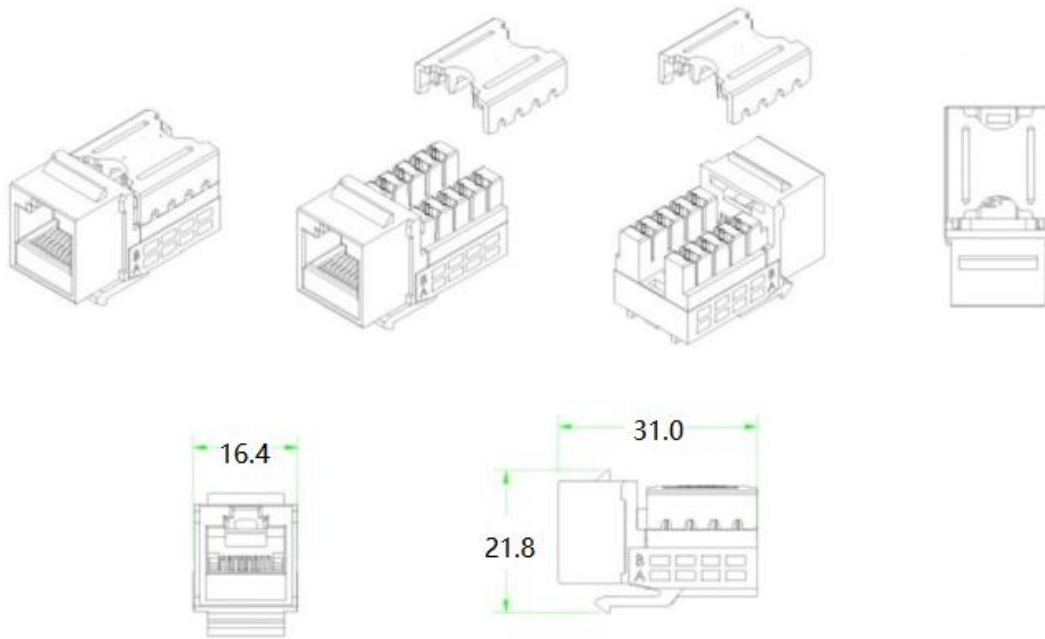

ELECTRICAL :

- | | |
|--------------------------|--------------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP |
| 3. CONTACT RESISTANCE | : 20 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 100 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 750 VAC RMS 60Hz, 1MIN. |
| 6. PERMANENT LINK | : CONFORM TO ANSI/TIA/EIA-568 B.2- 1 |

ENVIRONMENTAL

- | | |
|---------------|-----------------|
| 1. STORAGE: | - 40C TO + 70C. |
| 2. OPERATION: | -10C TO+60C. |

MECHANICAL:

- | | |
|-------------------------|---|
| 1. HOUSING MATERIAL: | PC / PC+ABS-94-V0 |
| 2. INSERT MATERIAL: | PC / PC+ABS-94-V0 |
| 3. PCB MATERIAL : | FR-4 T=1.2MM |
| 4. CONTACT MATERIAL | : PHOSPHOR BRONZE STAMP PIN T=0.35MM |
| 5. IDC CONTACT MATERIAL | : PHOSPHOR BRONZE T=0.50MM WITH TIN PLATING |
| 6. RJ45 JACK LIFE | : 750 TIMES MIN |
| 7. IDC LIFE | : 200 TIMES MIN |
| 8. WIRE: | AWG 22- 24 |