


Drop Cable

Product structure diagram

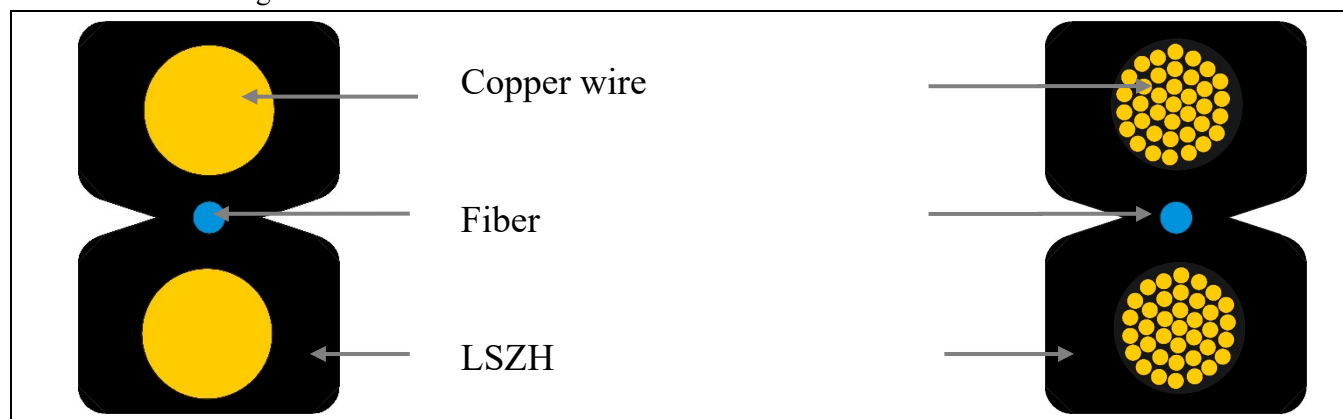

Cable Specification

Cable Cores		fiber	1	
FTTH	Fiber	Type	G.657A2	
	Strength Member	Material	copper wire	
		Diameter	1.0mm*2	1.0mm(0.2mm*18)*2
	Jacket	Material	Black LSZH	
		Diameter	2.1*3.1mm	
Tension		N	100	
Crushing		N/100mm	1000	
Min. Bending Radius (Dynamic/ Static)			40/20 Cable OD	
Temperature (Installation/Operating)		℃	-20~+60/-40~+70	

Parameters of fiber

Optical fiber type	Unit	G.657A2
Waveband	nm	1310/1550
Attenuation	dB/km	≤0.4/0.3
MFD (1550/1310)	μm	8.8±0.4/9.8±0.5
Cladding diameter	μm	125.0 ± 0.7
Coating diameter	μm	242±7