


Mechanical Variable Optical Attenuator(MVOA)

Features :	Applications:	
Wide Attenuation Range	Optical power control and equalization	
Low Insertion Loss	Receiver protection	
Low Back Reflection	Channel on/off switching	
Wavelength range Broad	Laboratory R&D	

Specification

Parameter	Specification
Attenuator type	transparence
Wavelength Range	1310+/-20nm or 1550+/-50
Attenuation Range	40 dB
Insertion Loss	<1dB
Attenuation Resolution	Continuous
Voltage	<15V
Input Power	500mw
Fiber type	Corning SMF-28
Pigtail length	1m
Operating Temperature	-5C~70C
Storage Temperature	-40C~85C
Dimension	16mm*9.1mm(L*D)

Exterior Dimension

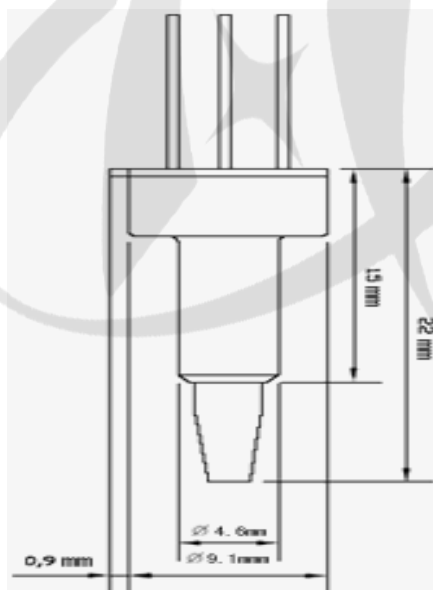

Order information

MVOA+					
Product type..					
T Transparency..					
O Opacity..					
Wavelength					
C 1528-1563nm..					
L 1570-1610nm					
1060nm(+/-15)..					
Attenuation Range+					
30 dB min..					
40 dB min..					
X XdB min..					
Linker type+					
1 FC/SPC..					
2 FC/APC..					
3 FC/UPC..					
4 SC/SPC..					
5 SC/APC..					
6 SC/UPC..					
7 LC/SPC..					
8 LC/UPC..					
9 MC/UPC..					
0 None..					
1 1 米..					
2 1.5 米..					